

“BLOOMING DOTS” PURSE...by Susie



For BATIK TEXTILES

Fabrics:

Black and White Medium Dot-----1/2 yard

Black and White Swiss Dot-----1/2 yard

Black and White Random Dot-----1/2 yard

Black Blender-----1/2 yard

Red Contrast-----1/2 yard

1 1/8 size covered button

2" velcro

1/2 yard batting or stablizer


CHERRY



#1436
contrast



#3238
Medium dot



#3239
Swiss dot



#3240
Random dot



#8008B
Black blender

*this pattern is available as a free download from
BATIK TEXTILES
at batiktextiles.com

INSTRUCTIONS for "BLOOMINGDOTS" PURSE

This purse is made by sewing different size strips of DOT batiks together on a backing of batting to measure 14" high and 17" wide. It is recommended to use a walking foot in the construction of the purse when sewing with the batting. All seams are 1/4" UNLESS otherwise noted.

IMPORTANT:

There is a Cutting/Layout on next page for the Contrast fabric only as that fabric has to be cut AS SHOWN or you will not be able to get all the pieces from 1/2 yard. Note the direction of placement for each piece.

The Layout Chart is not to scale. (ie; when you have cut the lining pieces- you only have 4" left from the width—2 straps @ 2"x27" takes all of that 4")

TEMPLATES are on the last page for the flower petals, flower center and the top and bottom corners of the purse.

FLOWER PETALS:

You need 5 flowers petals of #8008B (black) --- 5 of the contrast color and 5 of the batting. Place the 2 different fabrics RST, the batting on the back and sew around the petal -leaving marked end open for turning right side out. Repeat for all 5 petals. Turn right side out and press.

STRAPS:

Cut 2 strips from Medium dot #3238 @ 2"x27" each. Following the cutting/layout chart for the contrast fabric—cut 2 the same as the Medium dot- of the contrast fabric. Use a contrast and a medium dot for each strap. Place one of each, RST, and sew lengthwise. Press seam open. Lay strip of batting 3"x27" on wrong side, over pressed open seam-centering it. Fold at seam lengthwise, pin, press and topstitch 1/4" from folded edge. Turn in raw edges on open edge until strap measures 1" wide. Pin, sew/top stitch closed 1/4" from edge. Repeat for 2nd strap.

FRONT STRIP ORDER

left to right

1. #3239 (swiss dot).....3"x14"
2. #3240 (random dot)...2 1/4"x14"
3. #8008B (black).....2 3/4"x14"
4. #3239 (swiss dot).....3"x14"
5. #3240 (random dot)...3 1/4"x14"
6. #3238 (medium dot)...5 1/2"x14"

NOTE:

Green lines indicate placement order of folded contrast strips

1" strips 4 needed

Petals—5 needed of contrast and 5 needed of #8008B black

Contrast
lining
14"x17"

17"

14"

44"

Button cover


2 straps— 2"x27" each

Contrast
lining
14"x17"

17"

14"

18"

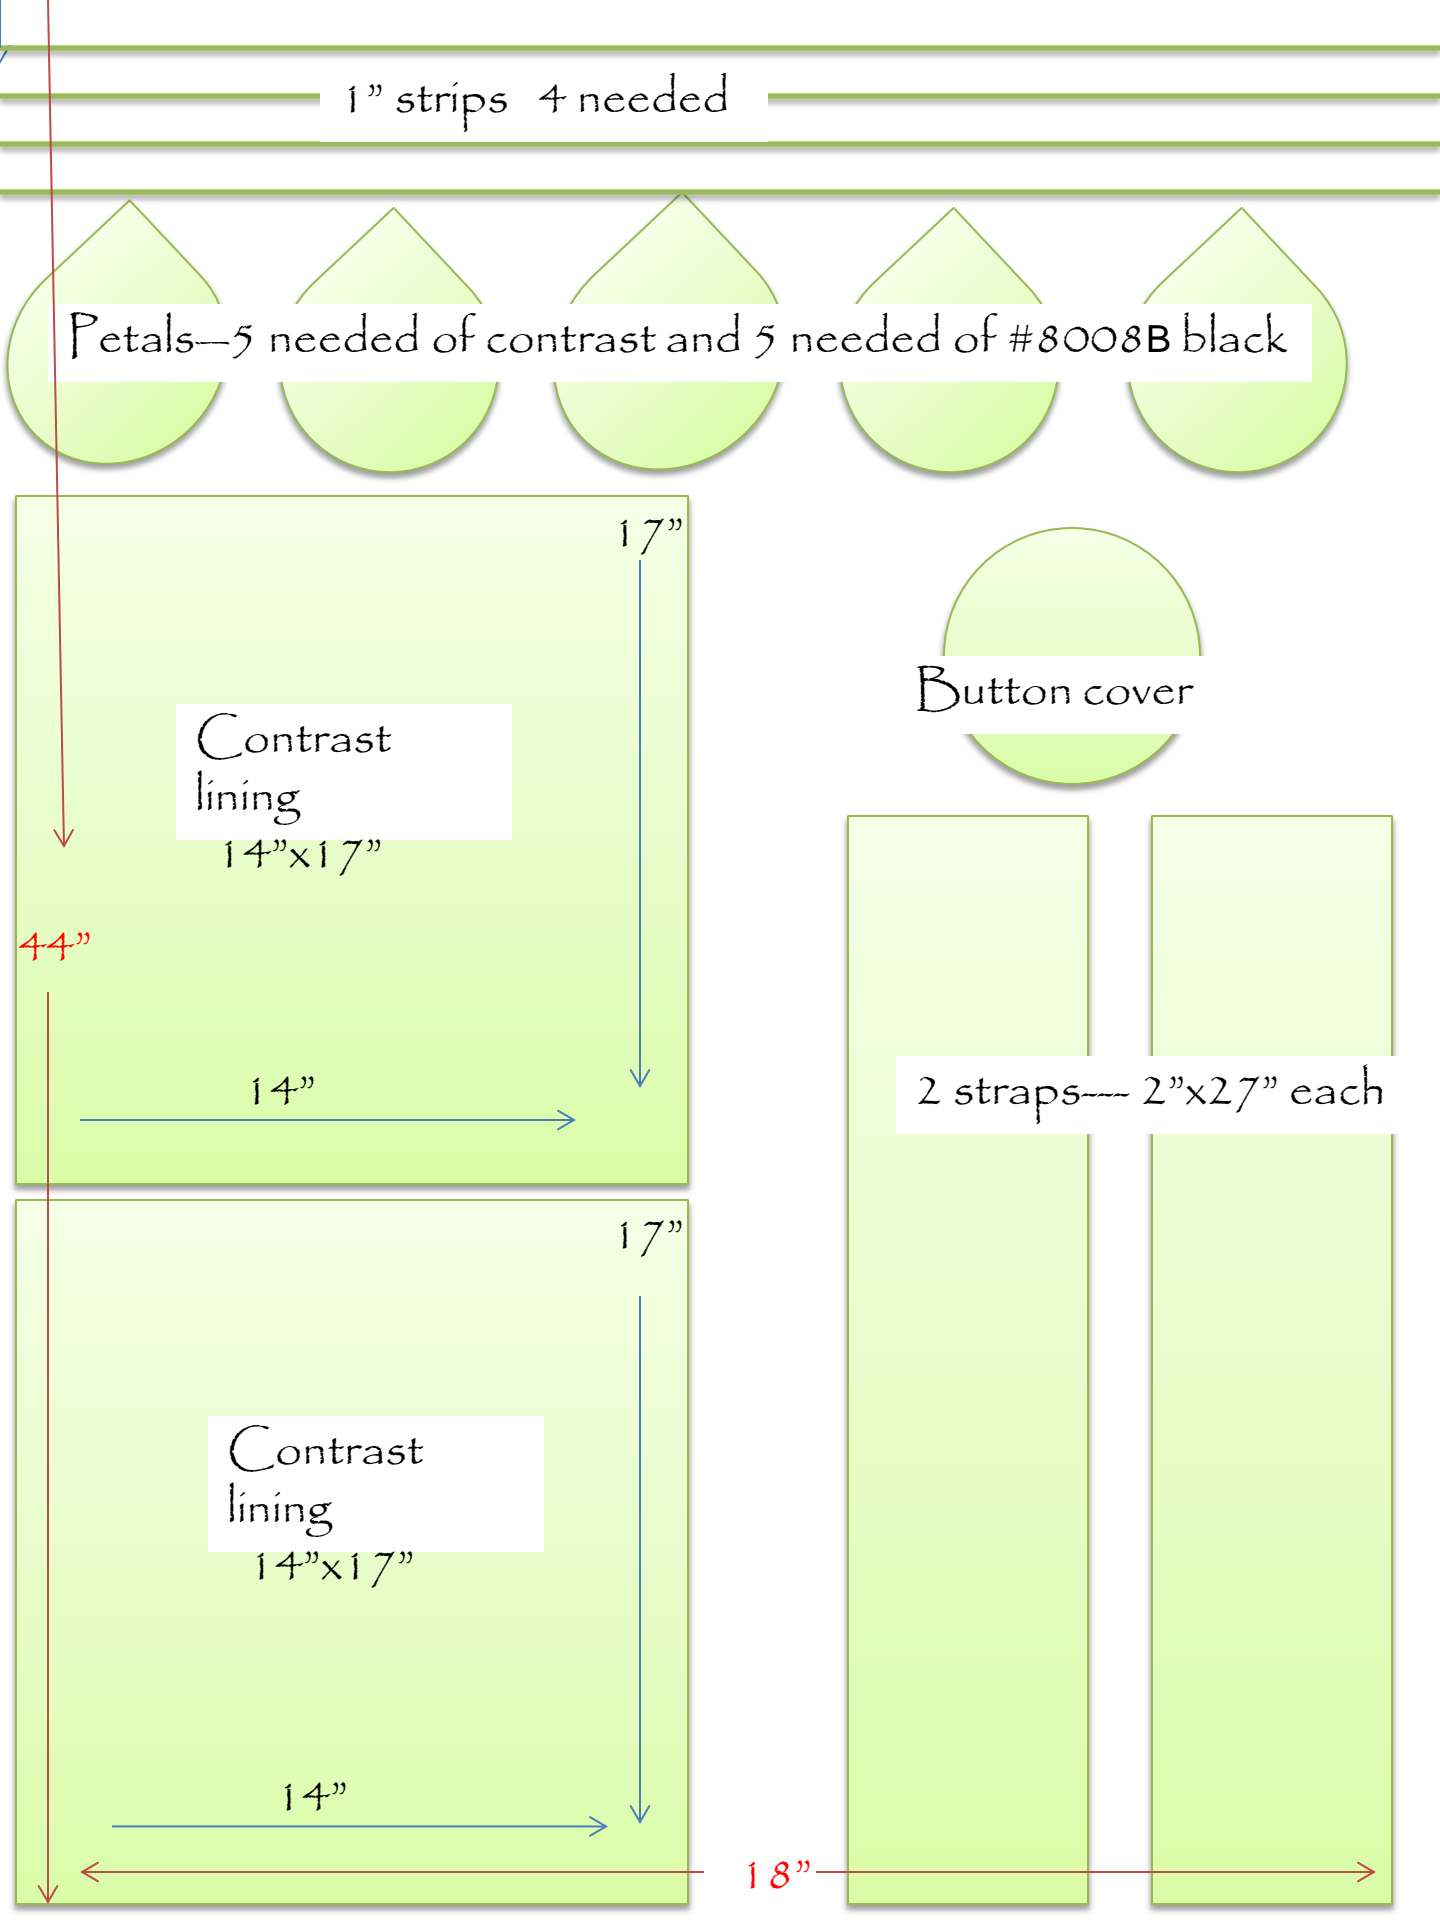

BACK STRIP ORDER

left to right

1. #3240 (random dot)...4"x14"
2. #3238 (med. dot).....3 3/4"x14"
3. #8008B (black).....2"x14"
4. #3239 (swiss dot).....1 1/2"x14"
5. #3240 (random dot)...3 1/2"x14"
6. #3239 (swiss dot).....2 1/2"x14"
7. #3238 (med. dot).....3"x14"

To create the front and back pieced panels you will sew the strips, from left side of panel to right-in order given. If you are using batting or "soft and stable"-your batting piece should be cut at 14"X17"-start with the 1st strip and place it on **the far left side** of your batting, as shown in **Diagram A**.

Take the next strip in the order given and place it, **RST**, on the 1st strip matching raw edges on the right side -as shown in **Diagram B**.

Sew from top of strip to bottom on right side. **Diagram C**. Press out.



Diag. A



Diag. B



Diag. C

Place a 1" x14" (folded in half lengthwise) contrast strip-matching raw edges -on top of previous strip. Sew. Do not press out. Place next strip in order on top of this, sandwiching the contrast fold in between as shown. Sew. Press this strip out.



Continue repeating the same steps for each strip...pressing out every strip-except the fold flap (contrast fabric) Placement of these are indicated by **Green Line** in strip order chart. Once the Front and Back are constructed, trim edges to equal 14" tall and 17" wide.

Use templates on page 5 to trim corners of purse front and back/top and bottom. Diagram is shown on page 4.

FOR PLACEMENT OF FLOWER PETALS:


Measure up from bottom of FRONT- 8" and draw a line. Mark center of front panel also. (I press panel in half, matching the sides, and use my fold line as reference for center.) Place 1 flower petal on each side of center- 1/2" from center mark and covering line drawn 8" up. Next 2 petals over-lap the 1st two and the final one is placed vertically over center fold line. Top stitch each petal from center-raw edge as shown on template.

See Diagram below.

Strap placement:

3" in from side and 2" down from top

Line-8" up

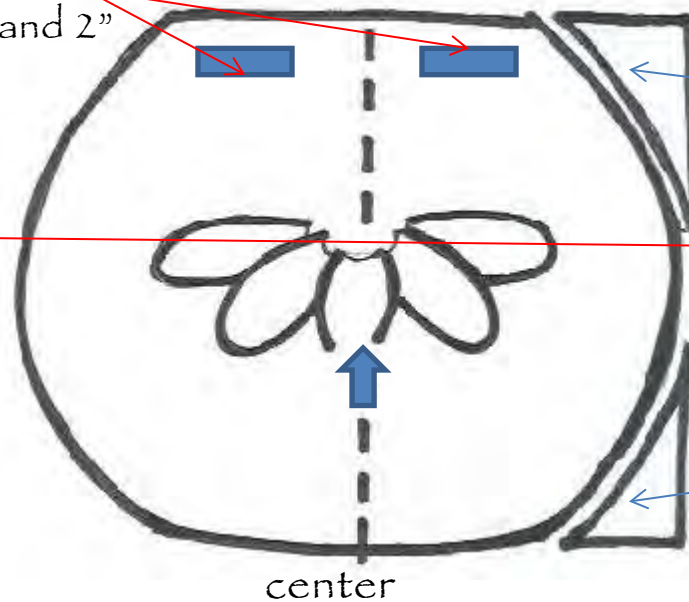

Top corner template

Bottom corner template

To finish the flower center—sew the 2 center ovals (#8008B) RST, leave small opening to turn right side out. Press.

Center over raw edges of flower petals and top stitch down. To center piece—Sew on button covered with contrast fabric.

Referring to Diagram/drawing above for STRAP PLACEMENT. The strap is tacked down 3" in from sides and 2" down from top. Sew on top of bag front 1 strap, Medium Dot side up. Repeat for back. Be careful not to twist strap when attaching to purse.

Now sew FRONT and BACK pieces, RST - reinforcing top of sides with backstitch. Turn right side out.

LINING and POCKET:

POCKET: Cut 2 pieces from one of the dot fabrics @ 6"x12" each. RST, sew together-leaving 1 1/2" opening on the long side, for turning right side out. Turn and press.

LINING: Use Templates for top and bottom corners on lining pieces. Trim.

On one of the lining pieces...find center and mark. Position pocket just made 3 1/2" up from bottom, centering it, with the opening at the bottom. Pin and top-stitch down the right side of the pocket, across the bottom and up the other side. Back stitch at start and stop to reinforce. Find center of pocket and stitch a seam line from top to bottom...creating 2 pockets.

Now sew the 2 lining pieces RST, leaving a 6" opening in the bottom for turning. Do not turn right side out. Slip the purse into the lining, RST; and match the top of the purse with the top of the lining- pin- keeping straps down and out of the way. Stitch all the way around the top. Pull the purse thru the opening of the lining. Press top edge and top stitch all the way around the top. Sew closed lining opening.

STRAP COVERS:

Cut from Black (#8008B) 4 rectangles @ 2 1/2"x6"

Fold each one in half to measure 3"x2 1/2"

Sew around raw edges-leaving small opening for turning right side out..

Turn all right side out- press. Fold in half again to measure 1 1/2"x2" finished.

Place one over each of the raw ends of the straps on the front of the purse to cover and top stitch all around strap cover - encasing the ends of the straps and sewing thru purse, batting and lining. Position Velcro on inside between straps, matching front and back and sew.

